

See discussions, stats, and author profiles for this publication at: <https://www.researchgate.net/publication/253172989>

The official Austrian geoid solution 2008: Data, Method and Results

Conference Paper · April 2009

CITATION

1

READS

145

8 authors, including:



R. Pail

Technische Universität München

167 PUBLICATIONS 2,748 CITATIONS

[SEE PROFILE](#)



Norbert Kühtreiber

Graz University of Technology

31 PUBLICATIONS 126 CITATIONS

[SEE PROFILE](#)



Christian Ullrich

Bundesamt für Eich- und Vermessungswesen

42 PUBLICATIONS 577 CITATIONS

[SEE PROFILE](#)



Norbert Höggerl

Federal Office of Meteorology and Surveying

12 PUBLICATIONS 38 CITATIONS

[SEE PROFILE](#)

Some of the authors of this publication are also working on these related projects:



recent height changes [View project](#)



Gravity Monitoring [View project](#)


THE OFFICIAL AUSTRIAN GEOID SOLUTION 2008

R. Pail, N. Kühtreiber, B. Wiesehofer, B. Hofmann-Wellenhof, C. Ullrich, N. Höggerl, D. Ruess, E. Imrek

INTRODUCTION

A new Austrian geoid and quasi-geoid model was computed as a combined solution of local terrestrial gravity field observations and global gravity field information based on data from the satellite gravity mission GRACE. Compared to the former Austrian geoid models, the accuracy could be significantly improved mainly due to the substantially enhanced quality of the input data, and several methodological developments.

The validation of the solution was performed by means of independent GPS/levelling information and the comparison with the European quasi-geoid model. The estimated geoid accuracy is in the order of 2-3 cm over the whole Austrian territory.

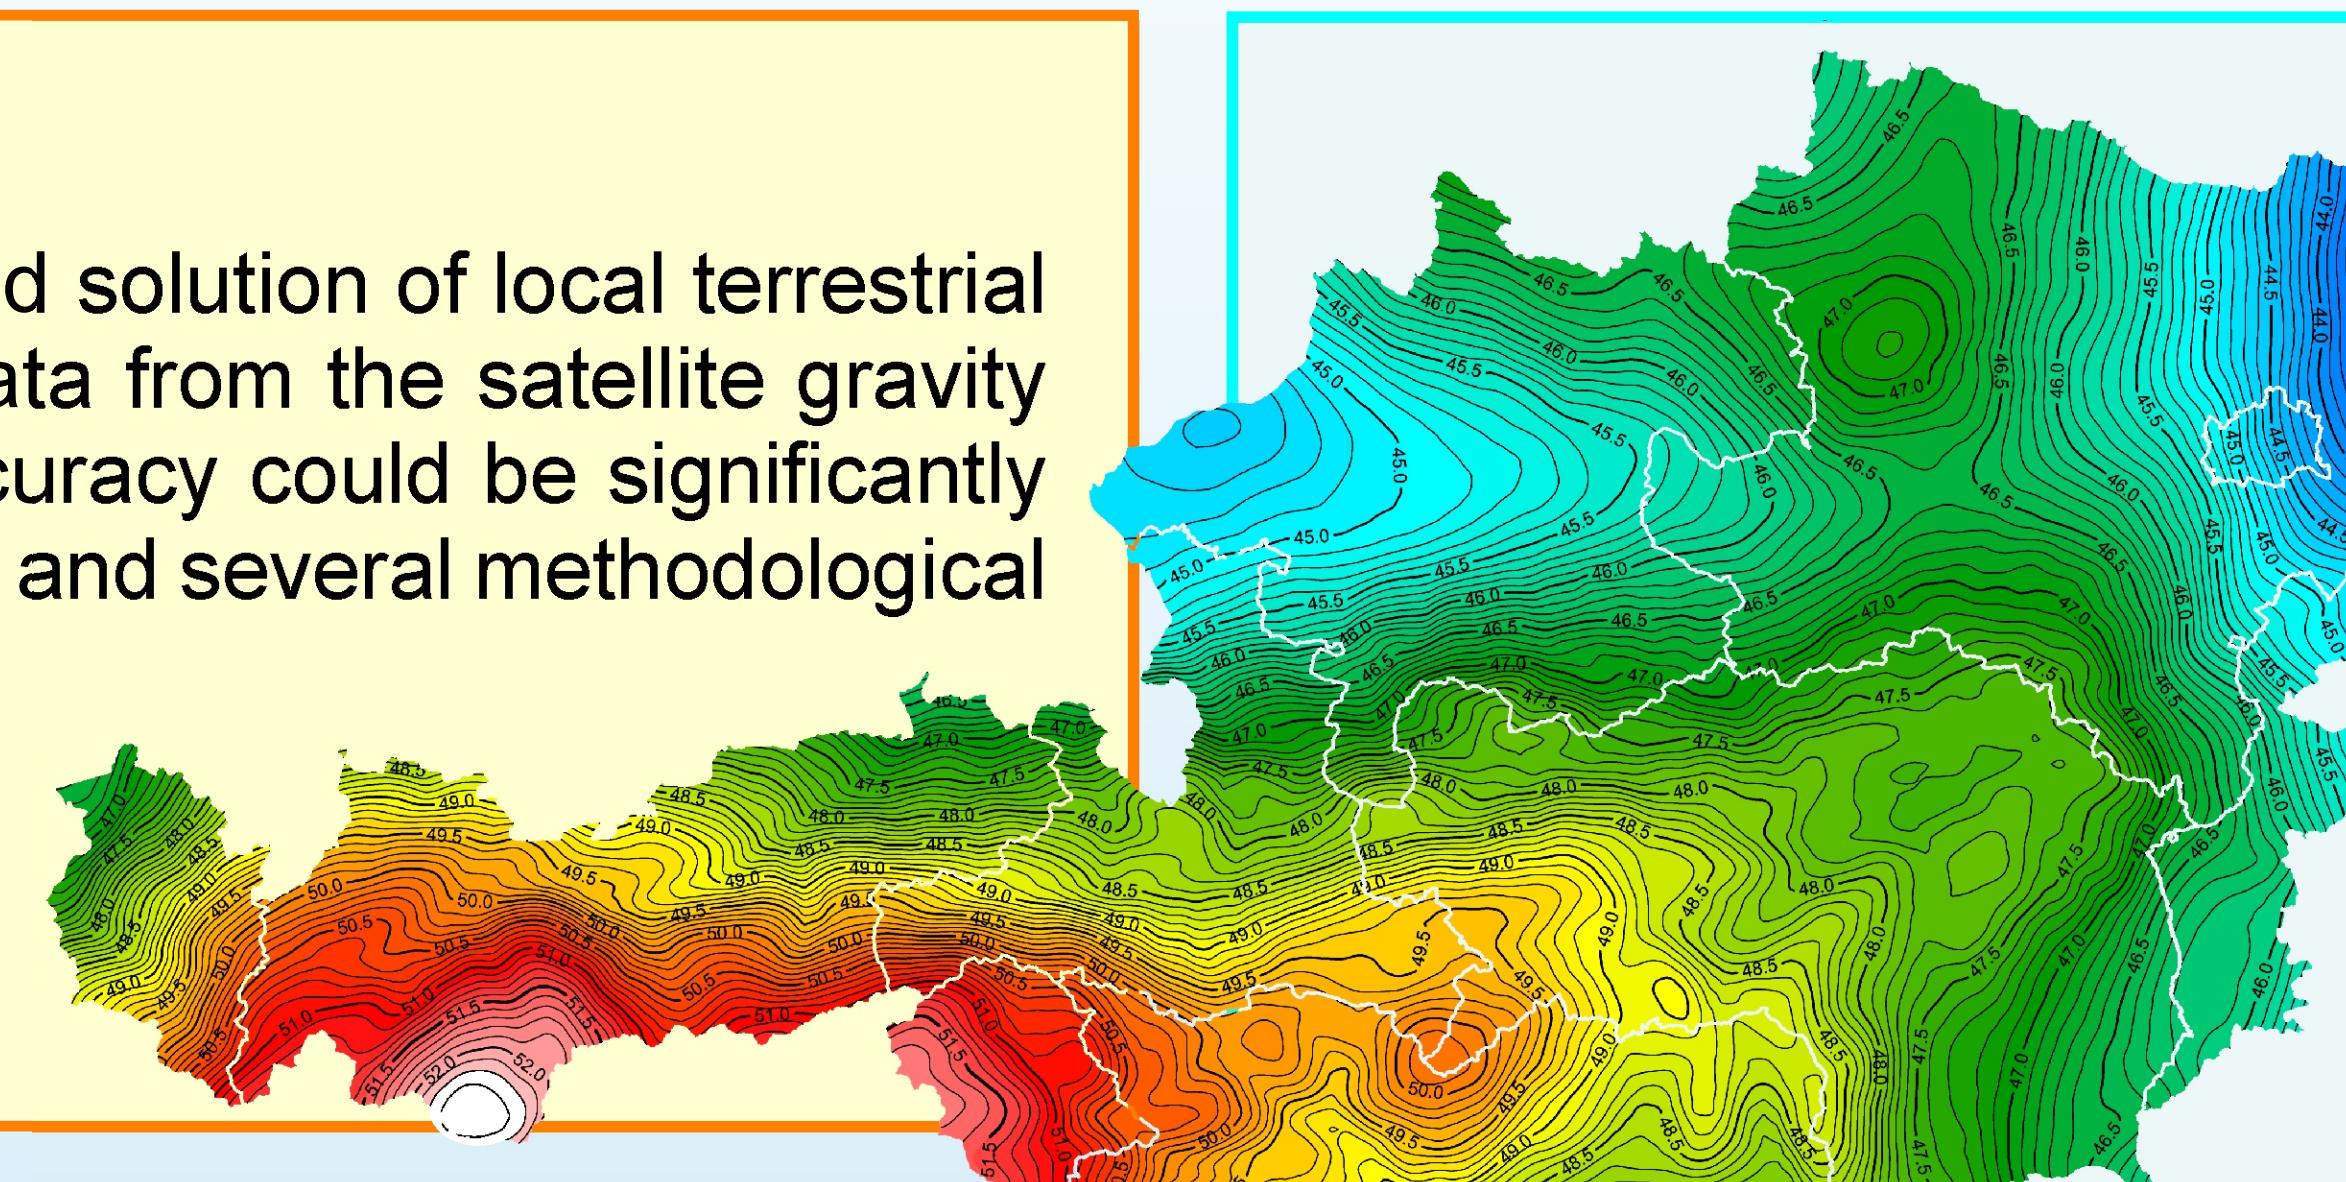

INPUT DATA

TERRESTRIAL DATA

Fig. 1 shows the distribution of the local data used for the geoid solution:

- gravity anomalies (gray; 14001 stations, approx. 4 x 4 km average distance)
- deflections of the vertical (red; 672 stations)
- GPS/levelling observations (blue; 170 stations).

GLOBAL GRAVITY MODEL

As global gravity field information, the GRACE satellite-only model EIGEN-GL04S complete to degree/order 70 has been used.

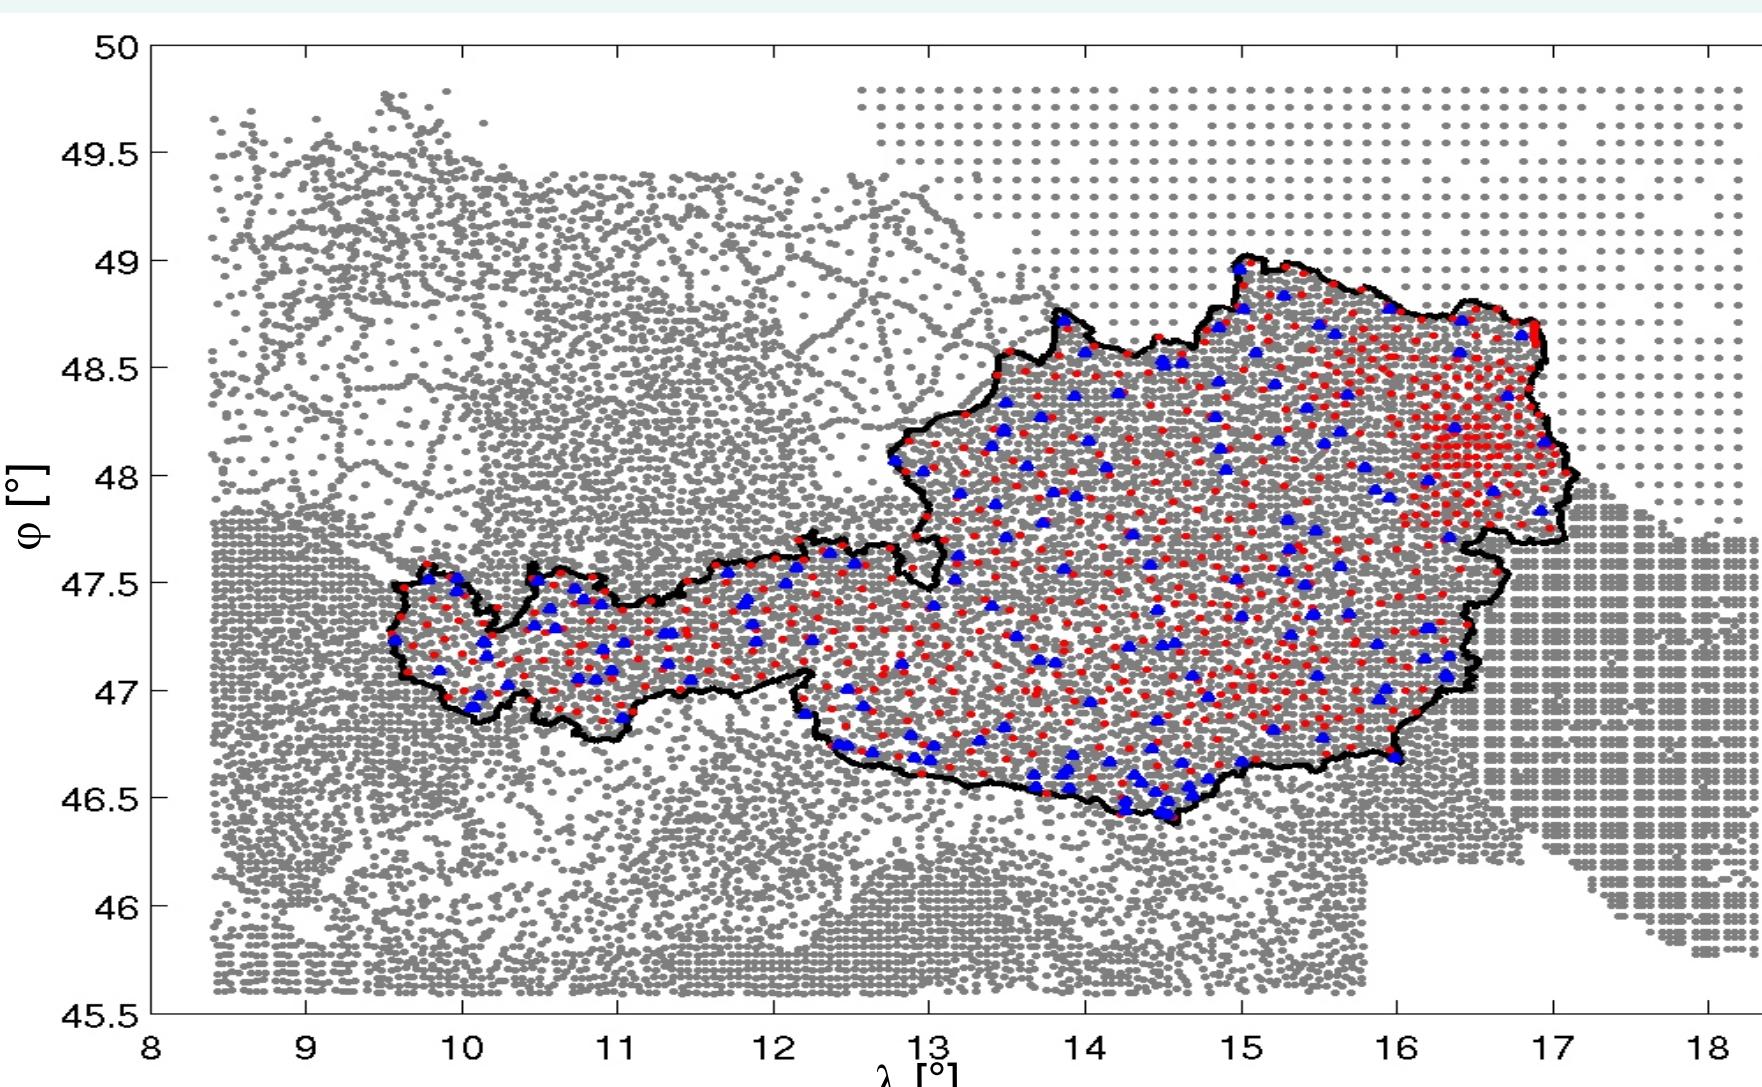


Fig. 1: Terrestrial data: gravity anomalies (gray), deflections of the vertical (red), GPS/levelling observations (blue).

DIGITAL TERRAIN MODEL

A new digital terrain model (DTM) with a resolution of 44 x 49 m was assembled as a combination of highly accurate regional DTMs of Austria and Switzerland, complemented by data of the Shuttle Radar Topography Mission (SRTM) in the neighbouring countries. Since SRTM reflects surface heights, a correction using Corine Land Cover (CLC90) data had to be applied. Fig. 2 shows the deviations of the orthometric height information assigned to the gravity field stations from the DTM, demonstrating very good consistency.

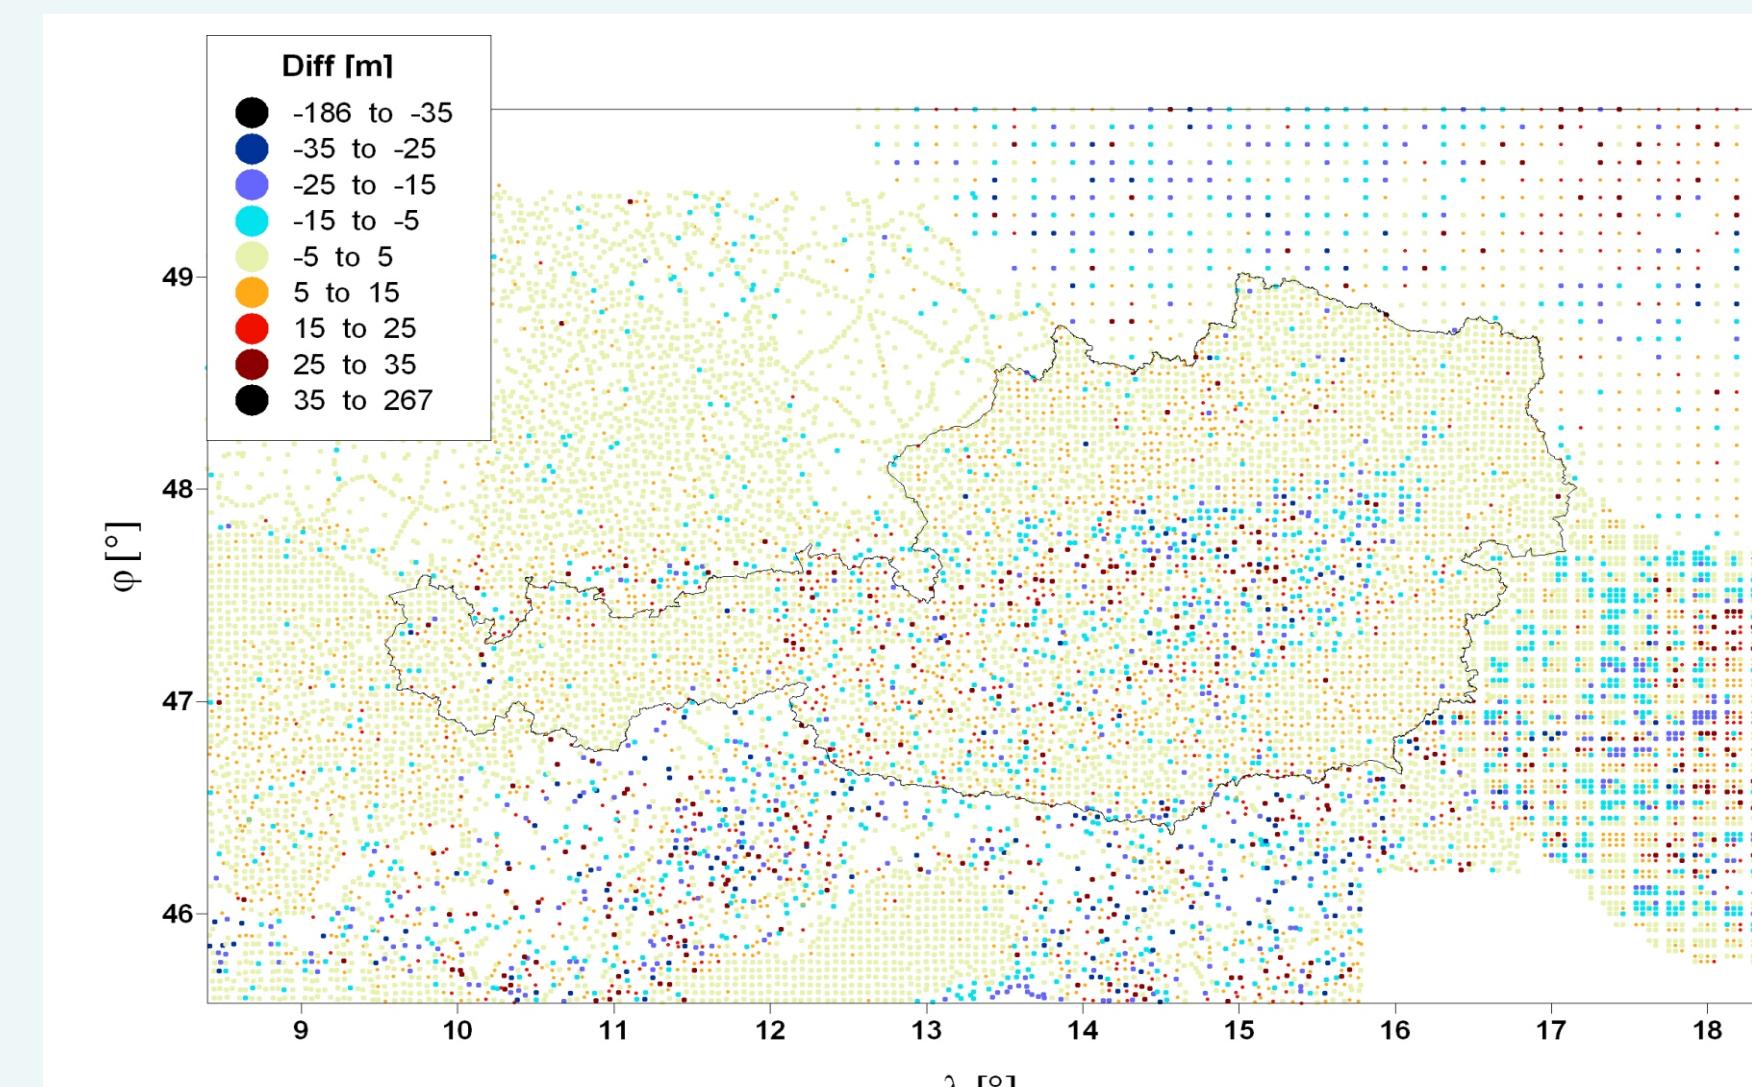


Fig. 2: Height accuracy [m] of new DTM.

THE AUSTRIAN GEOID

Fig. 3 shows the final Austrian geoid model after performing the restore step consistently. It is defined in ETRS89, and refers to the ellipsoid GRS80.

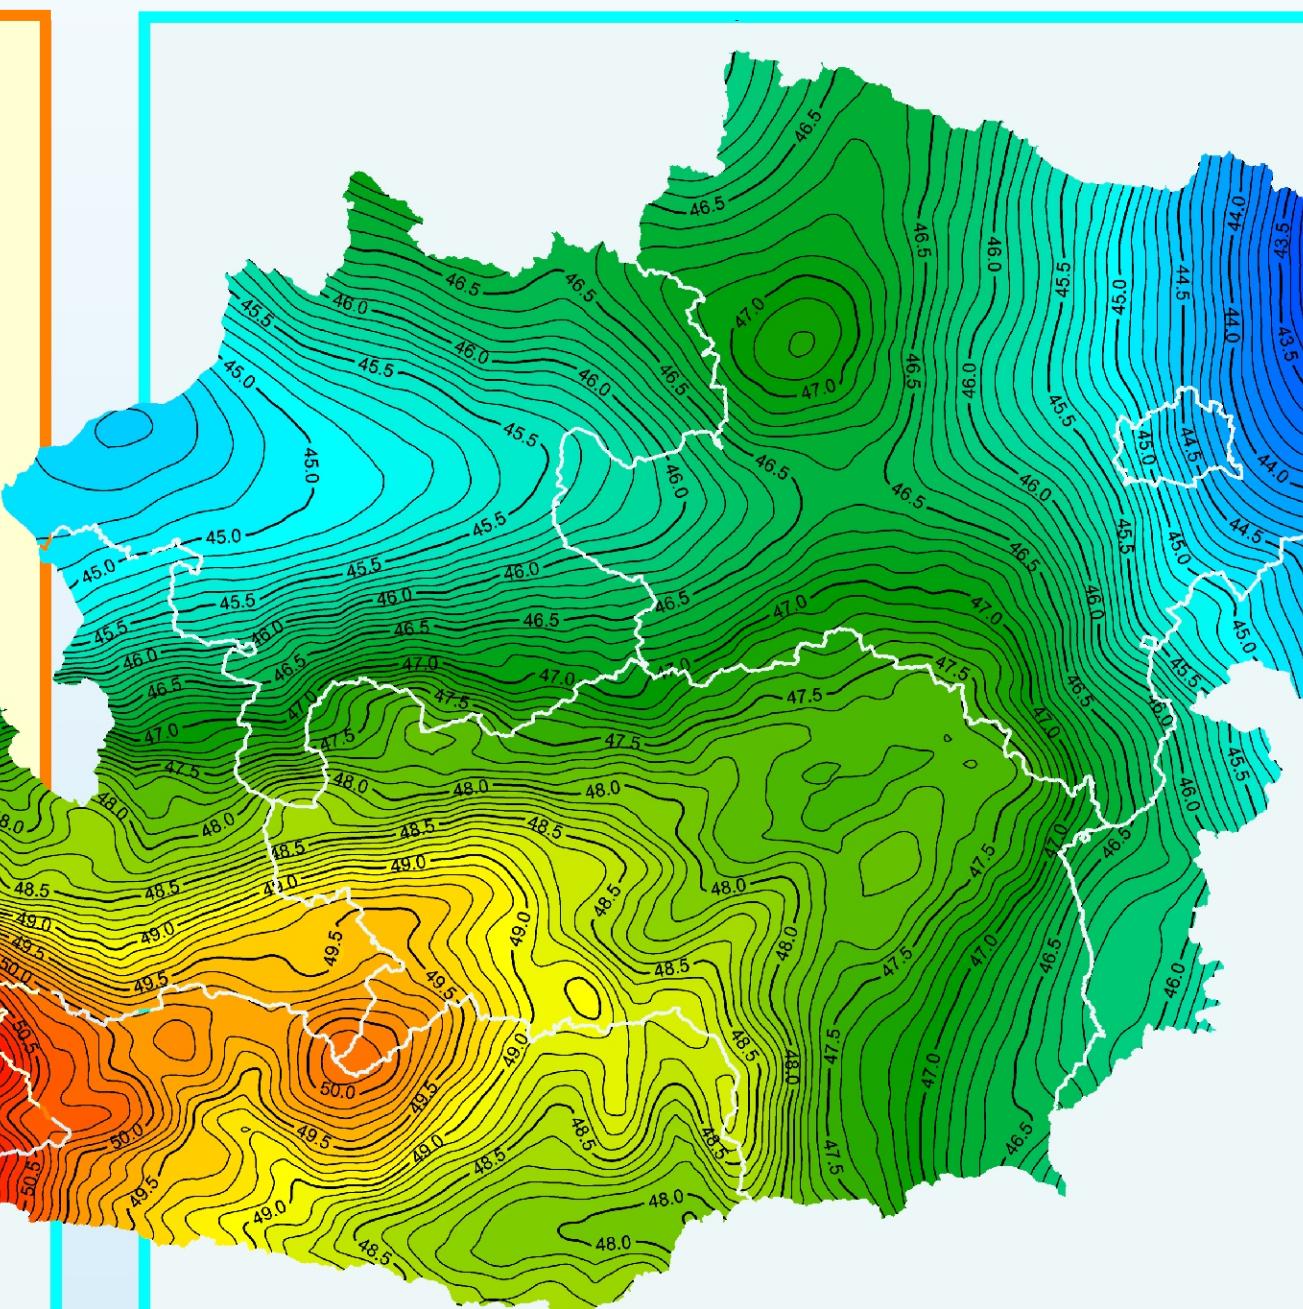


Fig. 3: The new Austrian geoid [m].

Fig. 4 displays the corresponding error estimates. The accuracy of this new solution can be estimated to be of the order of 2 to 3 cm, with a significant degradation in the border regions due to the insufficient input data distribution (cf. Fig. 1).

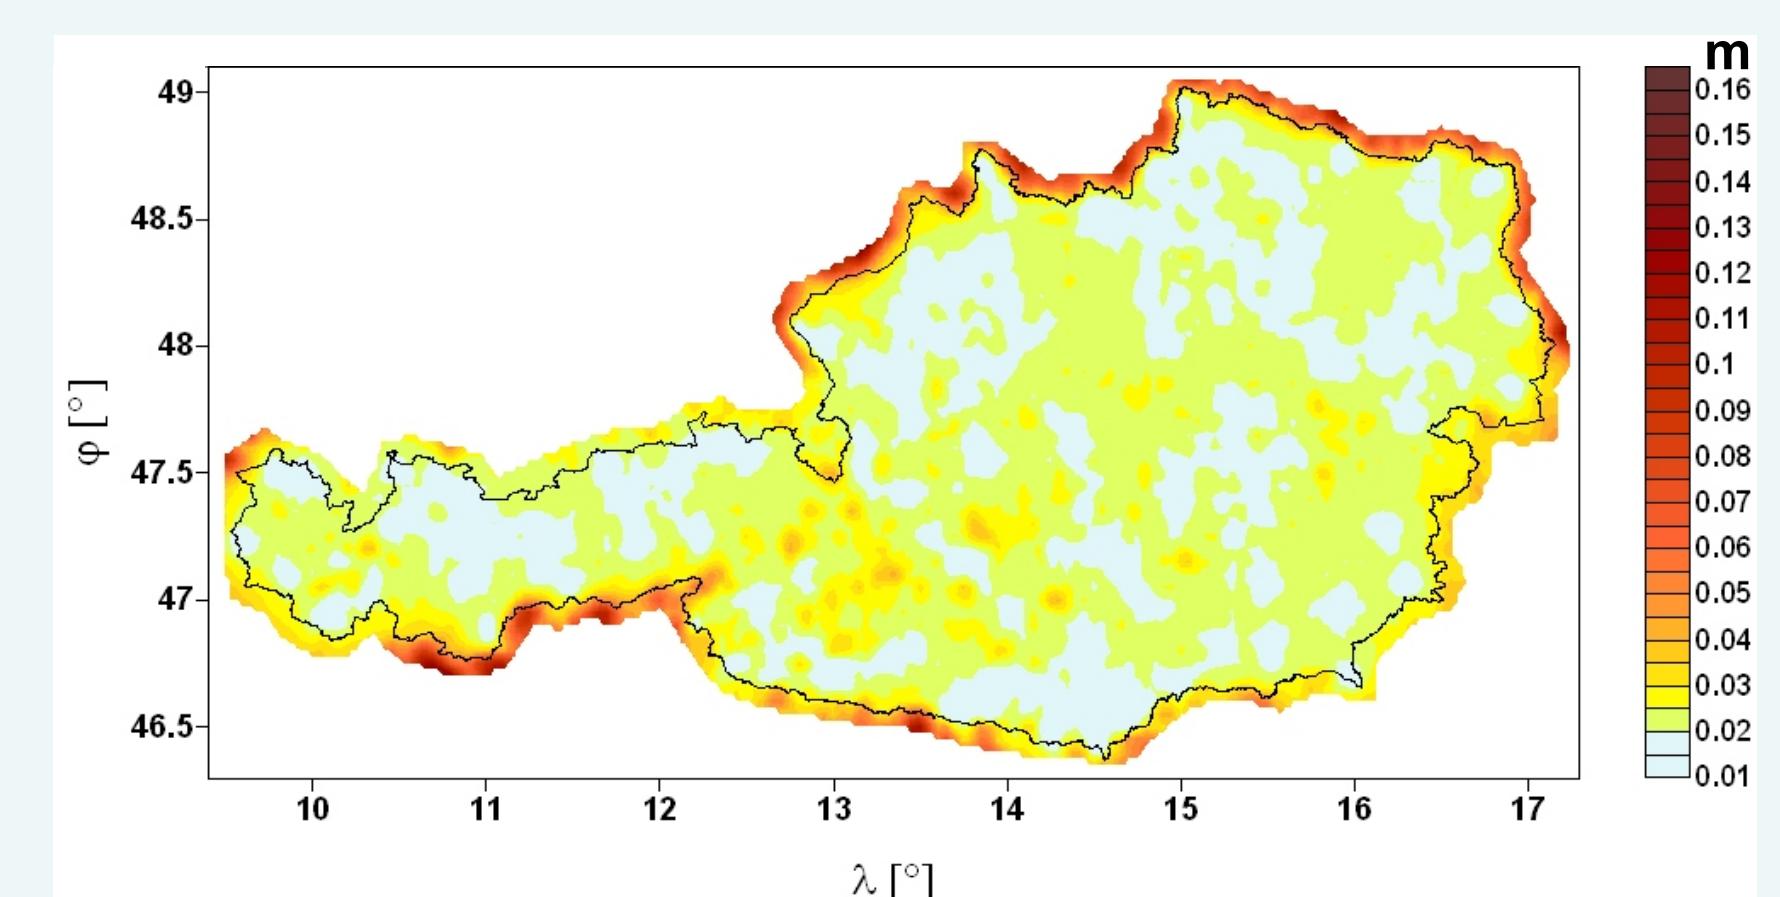


Fig. 4: Estimated absolute accuracy of the new Austrian geoid [m].

This error estimate is originally based on the formal errors of the LSC procedure, but has been re-scaled using the standard deviation of the residuals at selected GPS/levelling control points, and thus can be considered as a realistic estimate for the total error.

Fig. 5 shows the improvements of the new solution with respect to the former official BEV geoid model, which is a purely astro-geodetic solution dating from 1987.

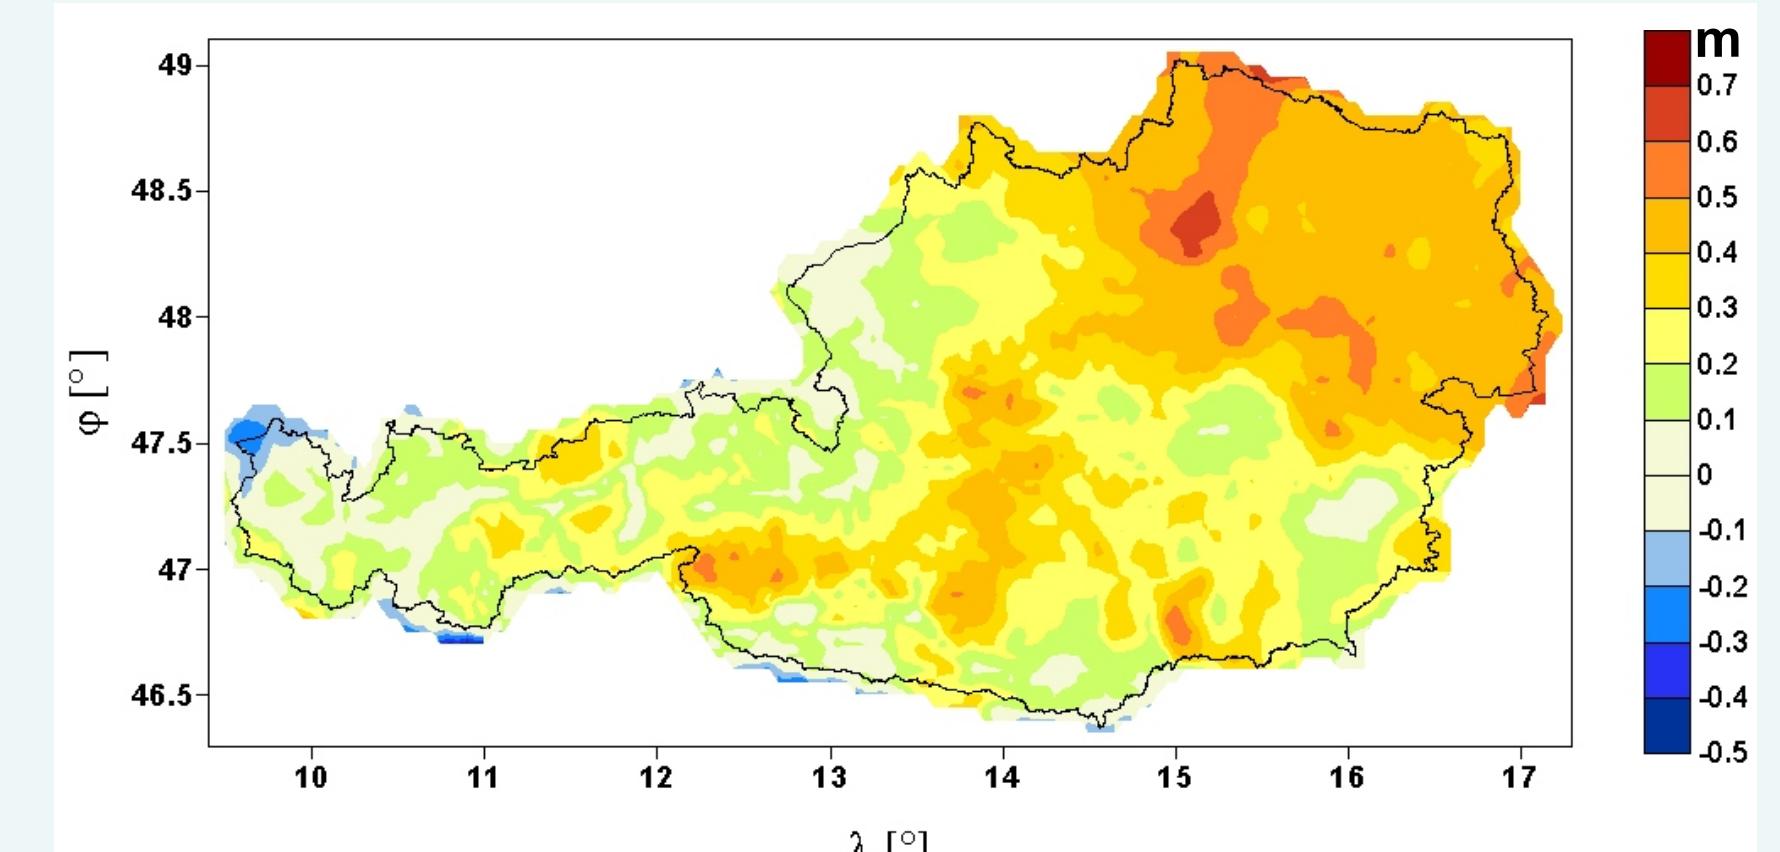



Fig. 5: Differences between the new Austrian geoid model and the former official BEV geoid [m].

VALIDATION

DEVIATIONS AT GPS/LEVELLING STATIONS

Fig. 6 shows the deviations of the geoid solution at the 170 stations of the highly precise GPS/levelling observations (resulting from GPS long-term measurements), which have been included in the geoid solution. The standard deviation is 2.2 cm.


Fig. 6: Deviations from highly precise GPS/levelling observations [m].

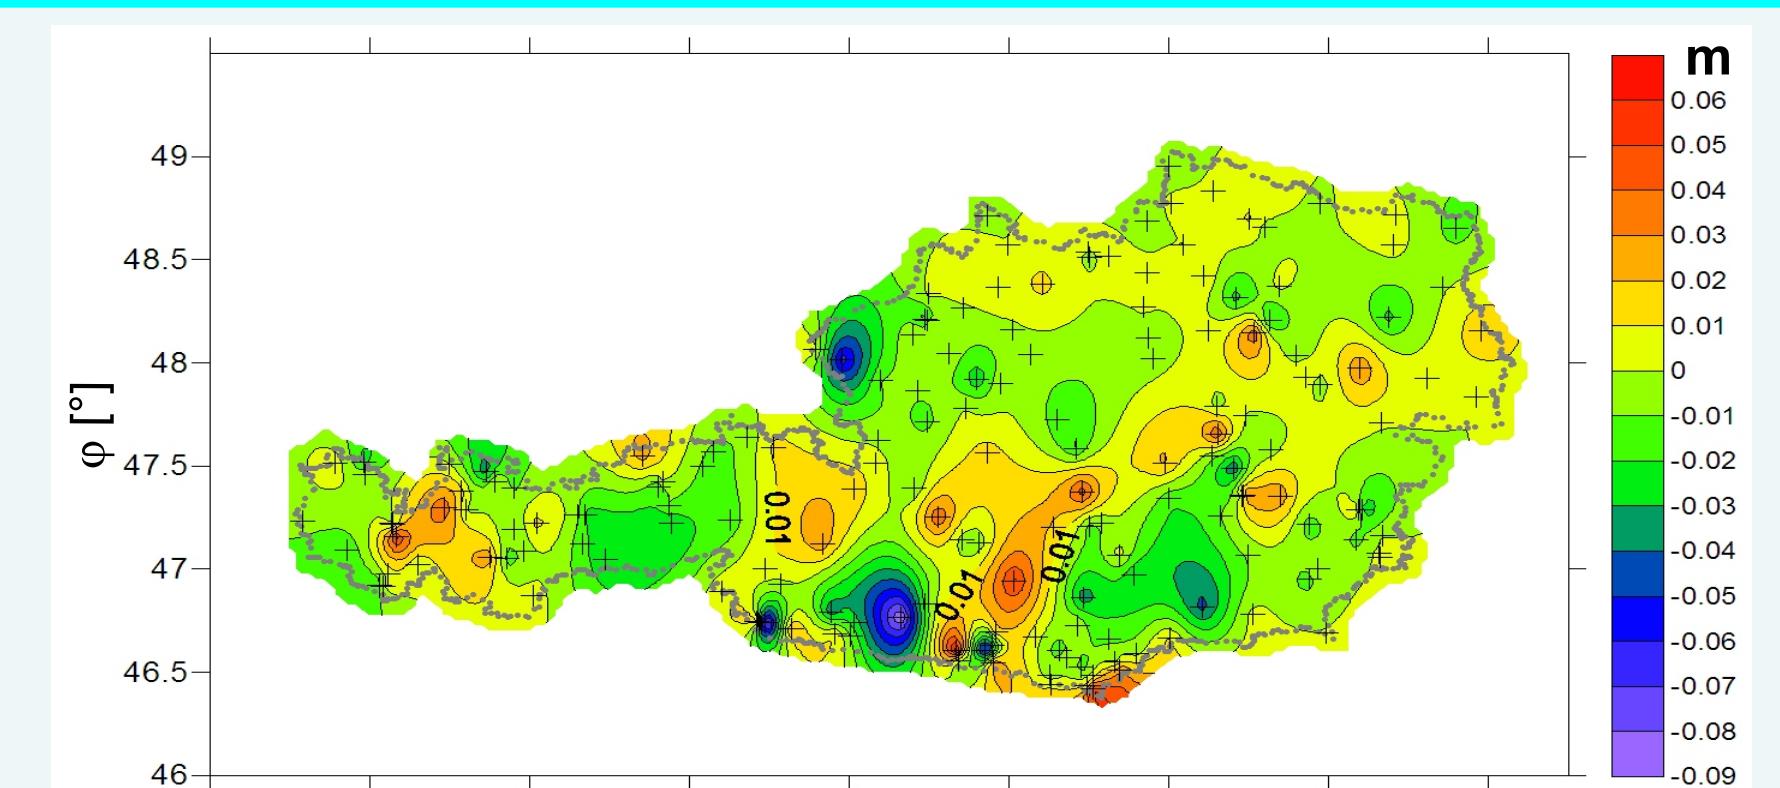

INDEPENDENT GPS/LEVELLING OBSERVATIONS

The new Austrian geoid solution was also re-evaluated based on 700 independent GPS/levelling observations in the Western part of Austria, which have not been included in the geoid solution. Fig. 7 shows the differences. The standard deviation is 4 cm. In the near future these validation stations will cover the whole Austrian territory.

Fig. 7: Deviations from independent GPS/levelling observations [m] in Western part of Austria.

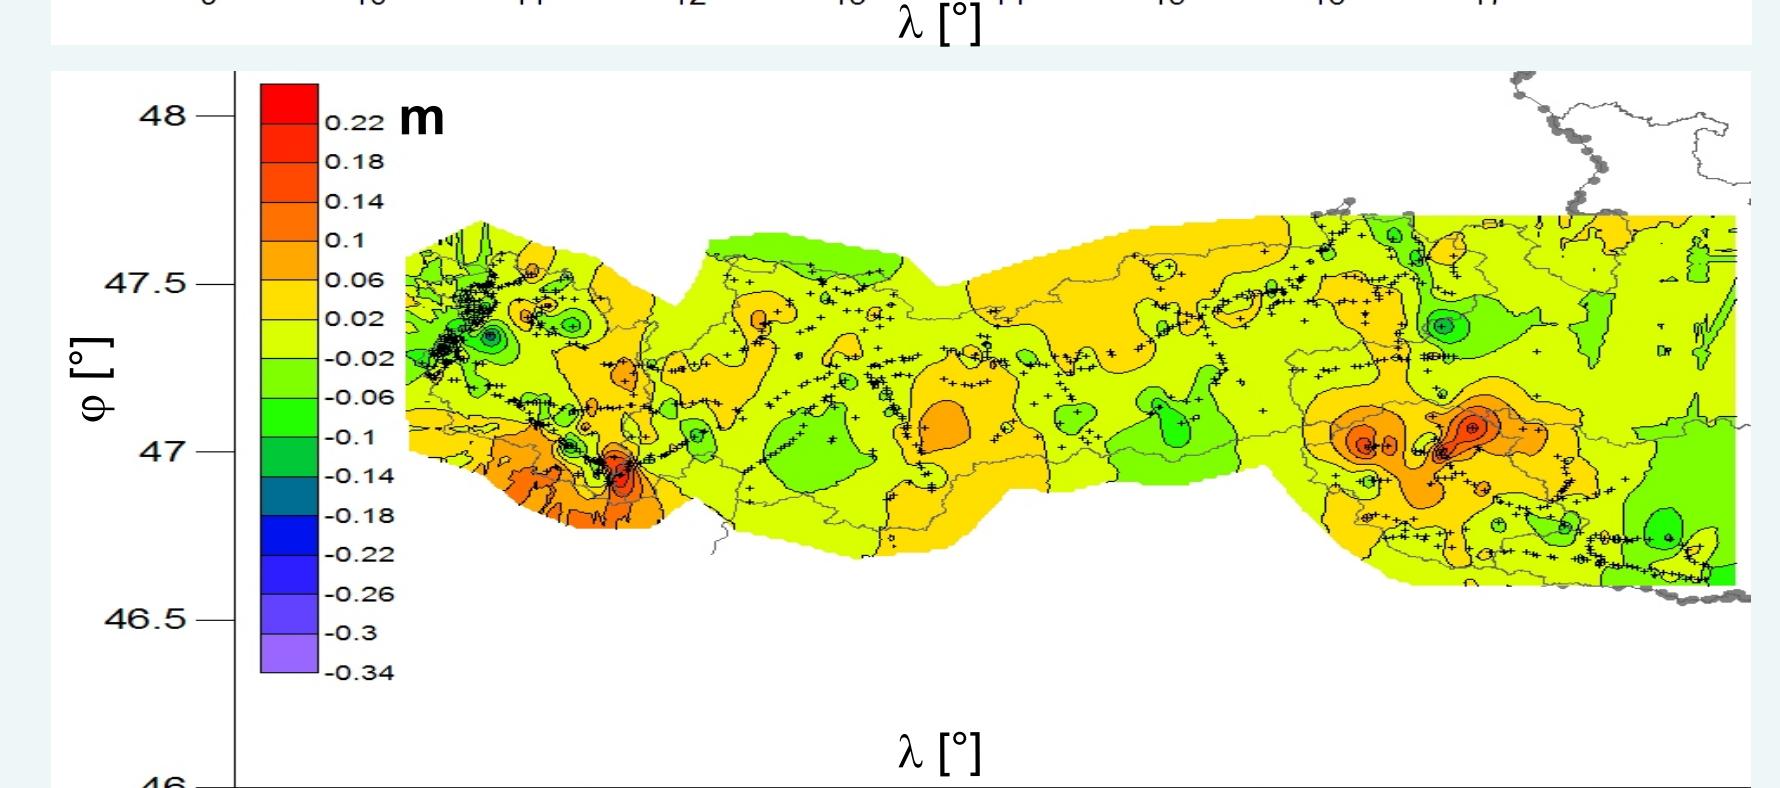

EUROPEAN QUASI-GEOID MODEL

In addition to a geoid model also a consistent quasi-geoid solution was computed. This quasi-geoid was validated against a European quasi-geoid solution (Denker et al., 2008). Fig. 8 shows the differences between these two quasi-geoid solutions in the Austrian territory. There is a small correlation with the topography.

Denker et al. (2008): A New European Gravimetric Quasi-geoid EGG2008. Poster presented at the IAG Symposium GEGO 2008, Chania, Crete, Greece.

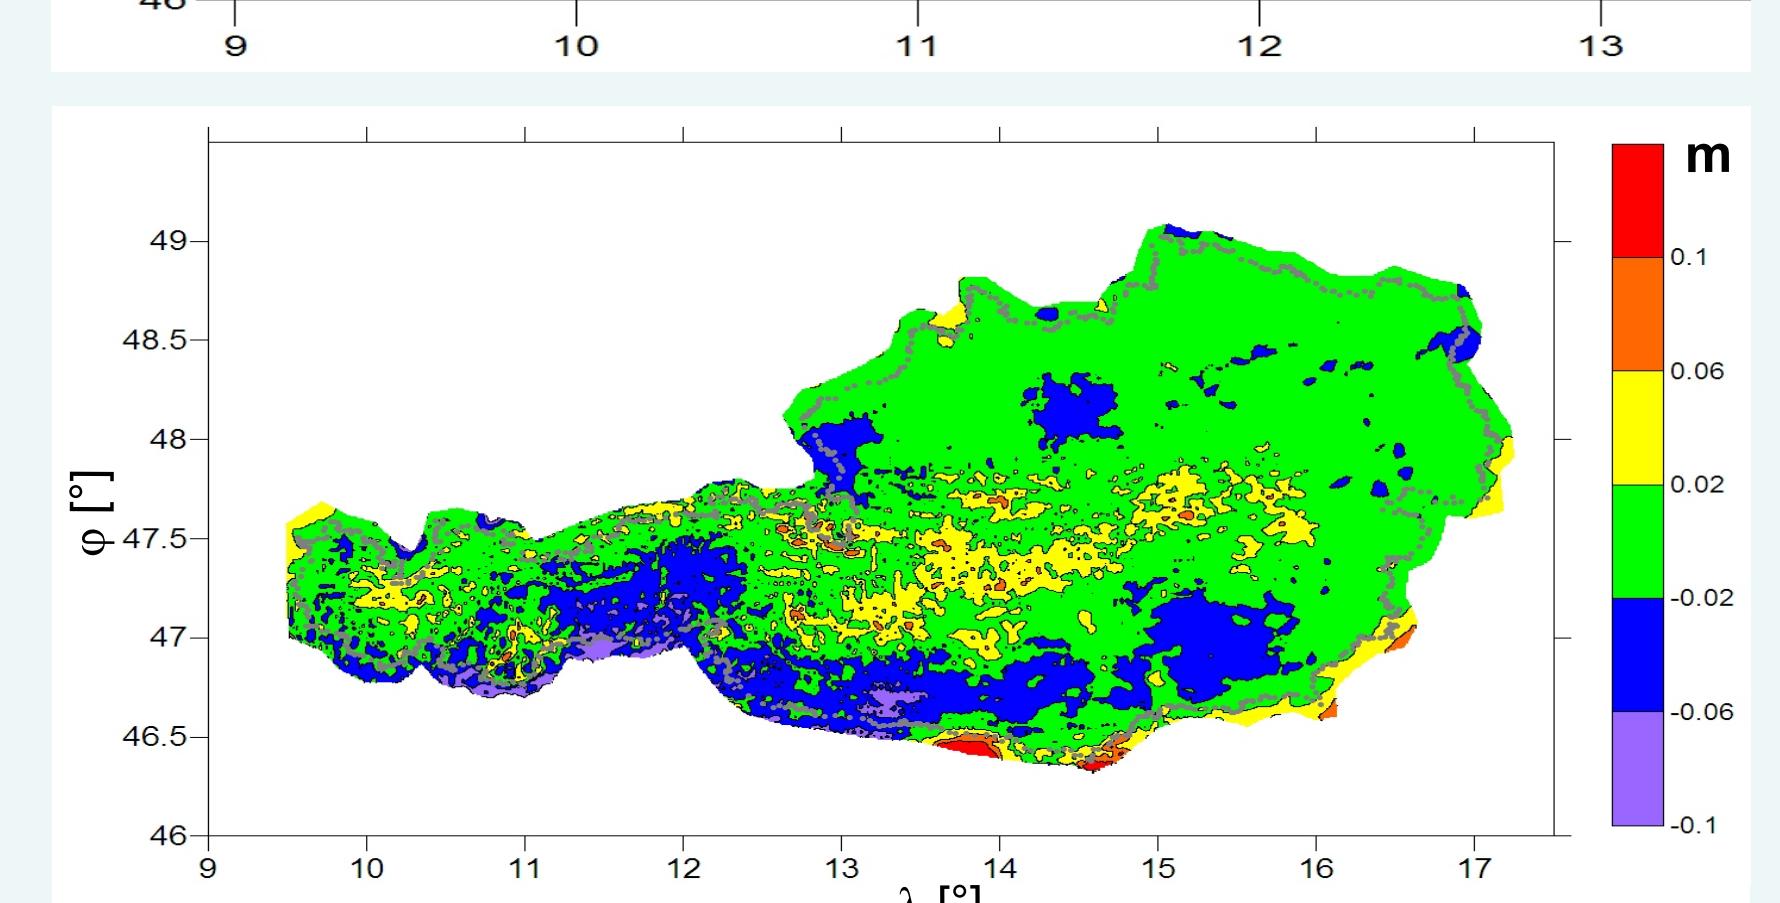


Fig. 8: Deviations from European quasi-geoid model [m].

GEOID COMPUTATION

The final geoid solution was computed applying Least Squares Collocation (LSC), and using the remove-restore technique. The basic idea is to remove the long-wavelength gravity field effect represented by the global gravity field model EIGEN-GL04S, and the high-frequency signals, which are mainly related to topography, by a topographic-isostatic reduction (Airy-Heiskanen model with a standard density of 2670 kg/m³). After reduction all quantities refer to the co-geoid.

The reduced gravity anomalies have been used to derive an empirical covariance function and to adapt the parameters of a Tscherning-Rapp covariance function used as analytic covariance model. One key aspect is the optimum relative weighting of the input data, especially concerning the GPS/levelling observations. This weighting has been performed by analysis of the residuals after application of the LSC. This information has then been used as noise covariance model in a second processing step.

Acknowledgments

This work was performed in the frame of the project "The Austrian Geoid 2007" of the Austrian Space Applications Programme (ASAP), funded by the Austrian Research Promotion Agency.